



ZINTRA® ACOUSTIC SOLUTIONS

WHAT ARE ZINTRA® ACOUSTIC SOLUTIONS?

Zintra® Acoustic Solutions absorb internal and external sound influences reducing the noise level in a room. People feel more comfortable in the environment, being able to converse freely, experience better speech intelligibility and don't have to fight to be heard. Zintra® offers all of these benefits in a range of colours and applications, sure to enhance your space.

INDEX

Acoustic Panels	04
Acoustic 3mm Sheets	10
Acoustic Digital Print	14
Acoustic Textures	18
Acoustic Patterns	24
Sliding Screen System	30
Acoustic Blades	32
Acoustic Baffles	36
Acoustic Clouds	42
Suspended Panel System	46
Acoustic Concertina	48
Desk Solutions	52

ZINTRA® ACOUSTIC PANELS



zintrac[®]

ZINTRA® ACOUSTIC PANELS

WHAT ARE ZINTRA® ACOUSTIC PANELS?

Zintrac[®] Acoustic Panels are the perfect solution for your application where sound reduction as well as aesthetics are required. Zintrac's[®] wide range of colours and ease of use make it the ideal material for commercial, hospitality, educational and institutional projects.


ZINTRA® ACOUSTIC PANELS FEATURES

- Cost effective sound absorbing solution ranging between α_w 0.30 - 0.95 / 0.45 - 0.90
- 2800mm long panels ideal for joint-free floor to ceiling applications
- Broad range of neutral and bright colours
- Suitable for multiple applications - walls, ceilings, screens, partitions, millwork
- Easily fabricated and installed
- Colour is uniform through entire thickness
- Tackable
- Digitally printable

ZINTRA® ACOUSTIC 12MM PANELS SPECIFICATIONS

CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.30 - 0.95 / NRC 0.45 - 0.90
PANEL SIZE / THICKNESS	2800mm x 1225mm x 12mm
SURFACE FINISH	Matte
WEIGHT	2.4kg / m ²
COLOURS	16 standard colours
APPLICATION	Indoor areas only
FABRICATION	Utility knife or CNC with oscillating knife
INSTALLATION	Adhere to substrate with Silicon based construction adhesive Attach with screws, Z-clips, nails, stand-offs, aluminium trim or millwork
FIRE RATING	In accordance with EN 13501-1, Zintra Acoustic 12mm achieves Class B-s2-d0
COLORFASTNESS TO LIGHT	In accordance with AATCC 16.3 option 3 the colour change at 20 AFU was 4.5
CARE INSTRUCTIONS	Vacuum to remove dust. Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellant coating available for additional protection.

OPTIONAL TRIMS

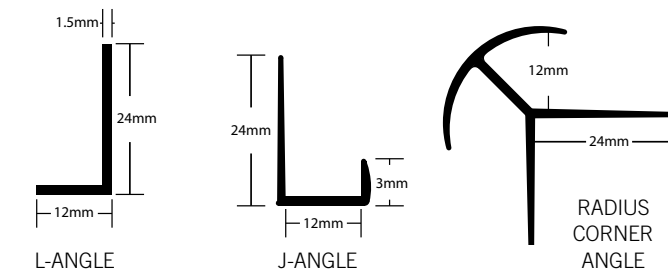

* ANGLE ONLY AVAILABLE IN SATIN ANODIZED.
SOLD IN 2800mm LENGTHS






ZINTRA® ACOUSTIC 24MM PANELS SPECIFICATIONS

CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.60 - 0.90 / NRC 0.75 - 0.95
PANEL SIZE / THICKNESS	2800mm x 1225mm x 24mm
SURFACE FINISH	Matte
WEIGHT	3.5kg / m ²
COLOURS	5 standard colours
APPLICATION	Indoor areas only
FABRICATION	Utility knife or CNC with oscillating knife
INSTALLATION	Adhere to substrate with Silicon based construction adhesive Attach with screws, Z-clips, nails, stand-offs, aluminium trim or millwork
CARE INSTRUCTIONS	Vacuum to remove dust. Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellant coating available for additional protection.

OPTIONAL TRIMS



* ANGLE ONLY AVAILABLE IN SATIN ANODIZED. SOLD IN 2800mm LENGTHS



FROST



PEWTER



GRASS



SLATE



ECRU



ZINTRA® ACOUSTIC 3MM SHEETS

ZINTRA® ACOUSTIC 3MM SHEETS

WHAT ARE ZINTRA® ACOUSTIC 3MM SHEETS?

Zintr® Acoustic 3mm sheets are a great acoustic and aesthetic solution developed in an easy to manipulate thickness perfect for use as wrapped panels, on curved surfaces and as a seamless wallcovering. Available as 2800mm x 1225mm sheet in 5 colors, Zintr® Acoustic 3mm sheets are ideal for commercial, hospitality, educational and institutional projects.

ZINTRA® ACOUSTIC 3 MM SHEETS FEATURES

- Cost effective sound absorbing solution with α_w 0.15 / NRC 0.15
- 2800mm long panel ideal for seamless applications
- Suitable for multiple applications – wallcovering, wrapped panels, curved surfaces
- Easily fabricated on-site and installed using wallcovering adhesive



ZINTRA® ACOUSTIC 3MM SHEETS SPECIFICATIONS

CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.15 / NRC 0.15
SHEET SIZE / THICKNESS	2800mm x 1225mm x 3mm
SURFACE FINISH	Matte
WEIGHT	0.6 kg / m ²
COLOURS	5 standard colours.
APPLICATION	Indoor areas only.
FABRICATION	Utility knife or CNC with oscillating knife.
INSTALLATION	Adhere to substrate with heavy duty wallcovering adhesive. As panel wrap – staple on to the back of panel.
FIRE RATING	In accordance with EN 13501-1, Zintra Acoustic 3mm achieves Class B-s2-d0
CARE INSTRUCTIONS	Vacuum to remove dust Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellent coating available for additional protection.





ZINTR[®] ACOUSTIC DIGITAL PRINT

ZINTR[®] ACOUSTIC DIGITAL PRINT

WHAT IS ZINTR[®] ACOUSTIC DIGITAL PRINT?

Zintr[®] Acoustic Digital Print combines the performance of a cost effective, sound absorbing solution with digital printing to create a graphic of your choice. Zintr[®] Acoustic 12mm can be digitally printed to provide that extra creative element to your project.

ZINTR[®] ACOUSTIC DIGITAL PRINT

- Transform your space by combining the acoustic properties of Zintr[®] with the design of your choice
- Cost effective sound solution with unlimited design flexibility
- Suitable for a multitude of applications – walls, ceilings, space division, signage and set in millwork
- Ideal for reinforcing branding and corporate identity
- Easily fabricated and installed
- Tackable



ZINTRA® ACOUSTIC DIGITAL PRINT SPECIFICATIONS



CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.30 - 0.95 / NRC 0.45-0.90
PANEL SIZE / THICKNESS	2795mm x 1220mm x 12mm
SURFACE FINISH	Matte
DIGITAL IMAGING	Inks used are LED UV cured with only 0.3% VOC and no heavy metals
APPLICATION	Indoor areas only.
FABRICATION	Utility knife or CNC with oscillating knife.
INSTALLATION	See Installation Instructions for Zintra® Acoustic 12mm Panels
FIRE RATING	In accordance with EN 13501-1, Zintra Acoustic 12mm achieves Class B-s2-d0
CARE INSTRUCTIONS	Vacuum to remove dust Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellent coating available for additional protection.

ZINTRA[®] ACOUSTIC TEXTURES

ZINTRA[®] ACOUSTIC TEXTURES

WHAT ARE ZINTRA[®] ACOUSTIC TEXTURE PANELS?



Zintr^a Acoustic Textures not only highlight the fantastic acoustic qualities of Zintr^a Acoustic 12mm, but also the ease in which the material can be fabricated on the jobsite. Zintr^a Acoustic Textures subtle three-dimensional relief creates dimension and acoustic refraction within your space, making them ideal for noisy, public spaces where good acoustic quality and aesthetics are required. Our wide range of designs and colors work easily in classic or modern settings.

ZINTRA[®] ACOUSTIC TEXTURE PANELS FEATURES


- Uniquely designed sound solution - α_w 0.30 / NRC 0.45
- Provides sound absorption as well as sound diffraction
- 2790mm long panels ideal for joint-free floor to ceiling applications
- 12 standard designs - see following page
- Easily installed
- Fabricated to specific size of project for simple installation

ZINTRA® ACOUSTIC TEXTURES SPECIFICATIONS

CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.30 / NRC 0.45
PANEL SIZE / THICKNESS	Maximum 2790mm x 1220mm x 12mm
SURFACE FINISH	Matte
WEIGHT	2.4kg / m²
COLOURS	16 standard colours. (See page 7)
APPLICATION	Indoor areas only
FABRICATION	Utility knife or CNC with oscillating knife
INSTALLATION	Adhere to substrate with Silicon based construction adhesive
FIRE RATING	In accordance with EN 13501-1, Zintra Acoustic 12mm achieves Class B-s2-d0
CARE INSTRUCTIONS	Vacuum to remove dust. Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellent coating available for additional protection.

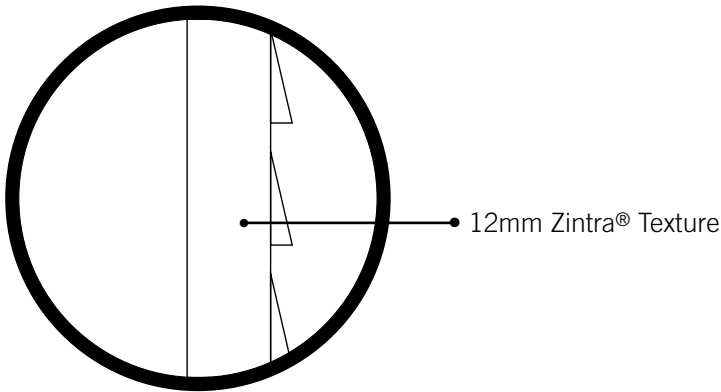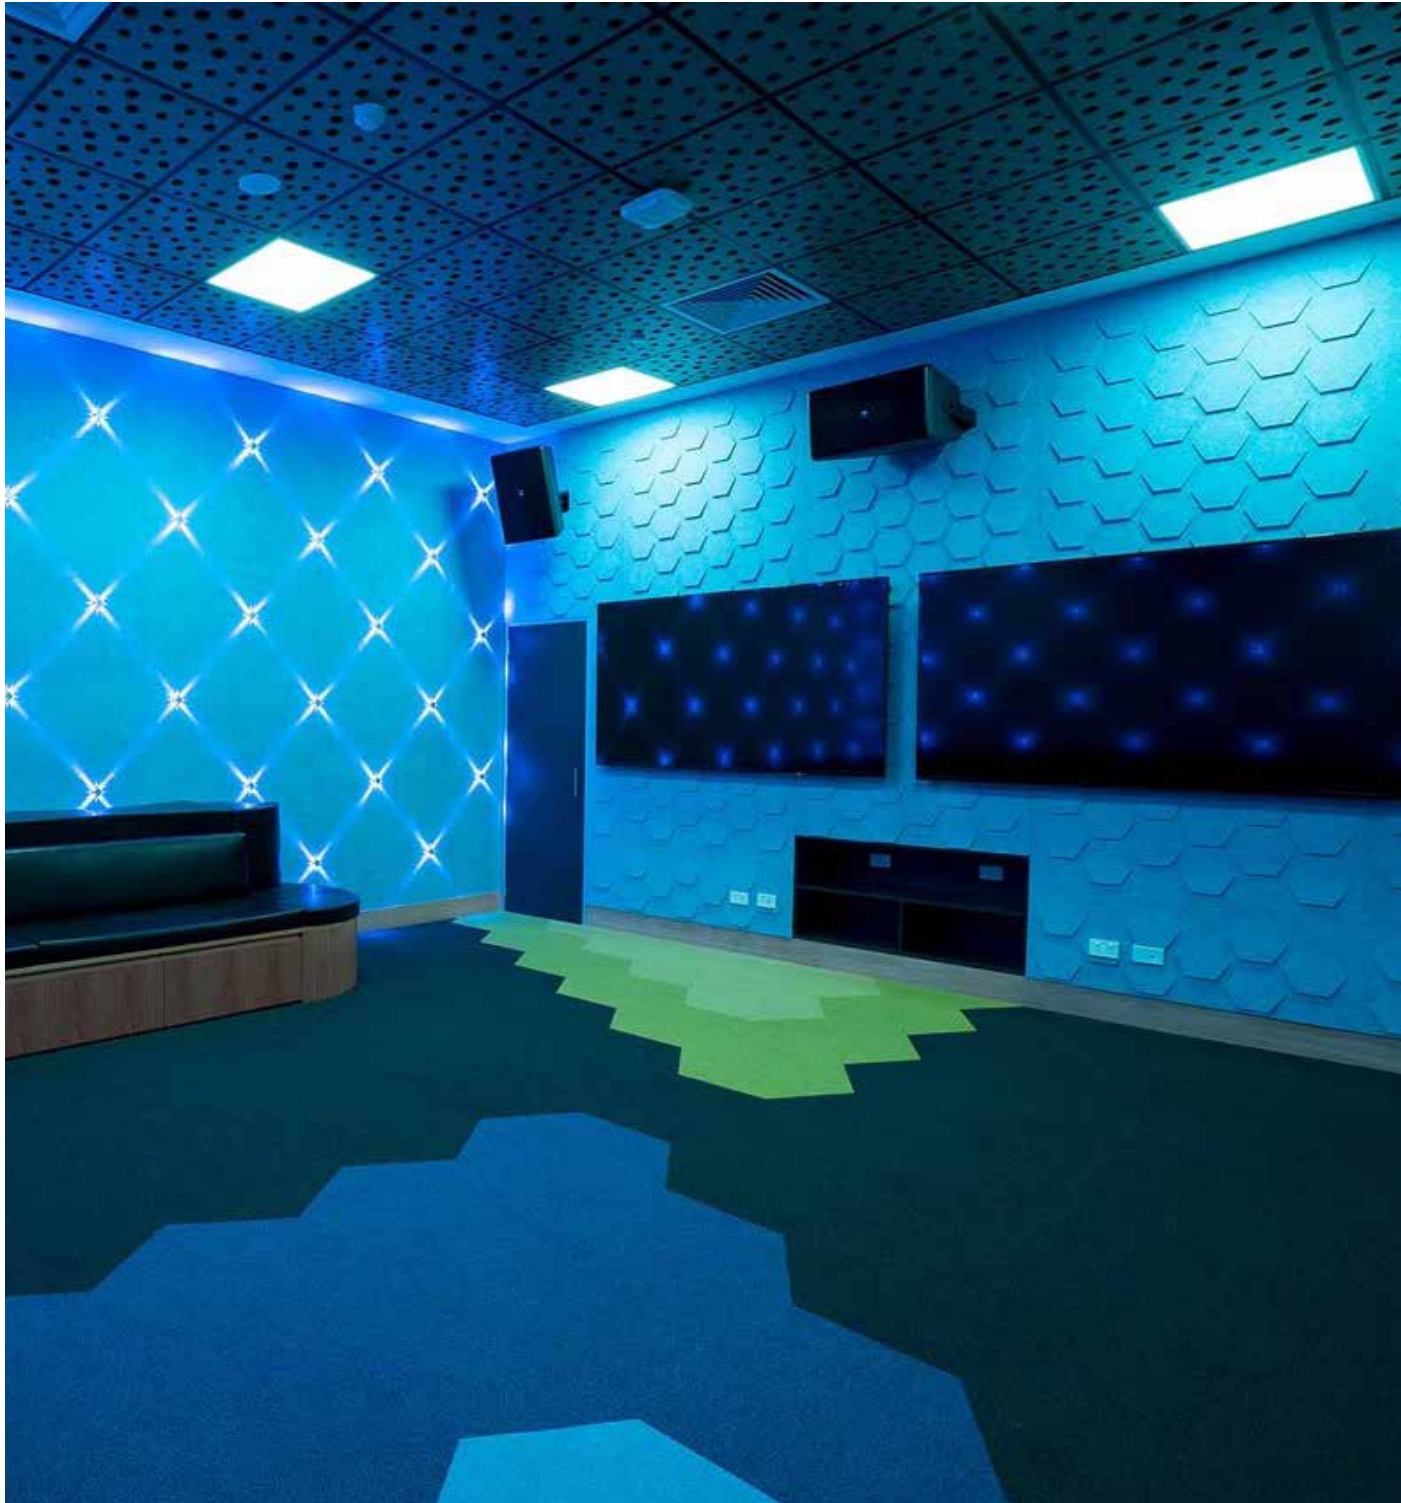

OPTIONAL TRIM

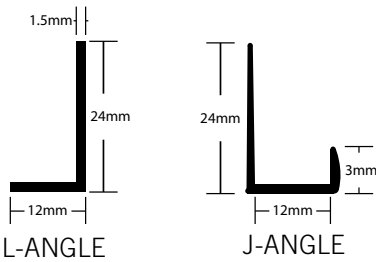

* ANGLE ONLY AVAILABLE IN SATIN ANODIZED.
SOLD IN 2800mm LENGTHS





ZINTRA[®] ACOUSTIC PATTERNS

ZINTRA[®] ACOUSTIC PATTERNS

WHAT ARE ZINTRA[®] ACOUSTIC PATTERNS?

Experience our range of classic to contemporary design patterns cut out of Zintr^a. Whether it is the Zintr^a pattern layer only or the Zintr^a pattern on a matching or contrasting solid Zintr^a Panel as the backer, it will create a unique look for walls, dividers, or ceilings. In just the one product you will find style, texture, contrast and depth with the added benefit of sound absorption and sound refraction to create a harmonious environment. The two layers of Zintr^a Acoustic Patterns also increases the alpha w (aw) value.


ZINTRA[®] ACOUSTIC PATTERNS FEATURES

- aw 0.30 - 0.95 / NRC 0.45 - 0.95 depending on design and installation method
- Use as pattern layer only or the pattern layer with Zintr^a Acoustic 12mm backing
- Easy installation using Z-clips, adhesive or other mechanical mounting methods
- Tone-on-tone or two tone colour combinations
- Ability to easily customize design for specific project requirements
- Apply directly to walls or ceilings or use as room dividers
- Fabricated to specific size of project for simple installation




ZINTRA® ACOUSTIC PATTERNS SPECIFICATIONS


CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.30 - 0.95 / NRC 0.45 - 0.95
PANEL SIZE / THICKNESS	Zintra Pattern on Zintra maximum = 2790mm x 1220mm x 24mm Zintra Pattern Only = 2790mm x 1220mm x 12mm
SURFACE FINISH	Matte
WEIGHT	Zintra Pattern on Zintra maximum 4.8kg/m ² Zintra Pattern Only 2.4kg / m ² depending on design
COLOURS	16 standard colours. (See page 7)
APPLICATION	Indoor areas only
FABRICATION	Utility knife or CNC with oscillating knife
INSTALLATION	Adhere to substrate with adhesive. Attach with screws, nails, stand-offs, aluminum trim or millwork
FIRE RATING	In accordance with EN 13501-1, Zintra Acoustic 12mm and Zintra Pattern on Zintra achieve Class B-s2-d0
CARE INSTRUCTIONS	Vacuum to remove dust. Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellant coating available for additional protection.

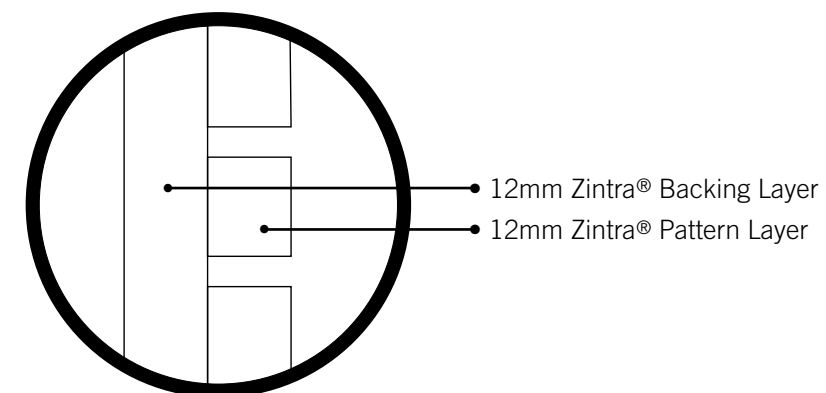


OPTIONAL TRIM




* ANGLE ONLY AVAILABLE IN SATIN ANODIZED.
SOLD IN 2800mm LENGTHS

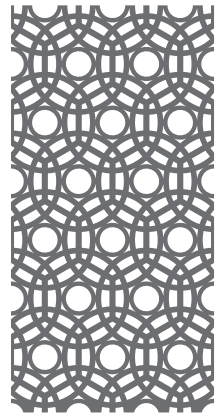


ABHAYA

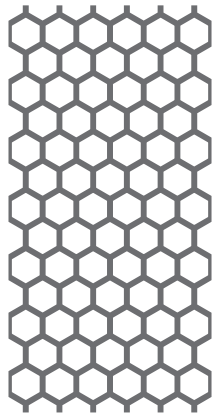


ASIATIC

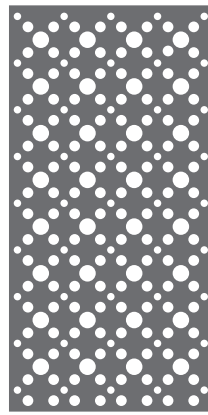

ASTRA

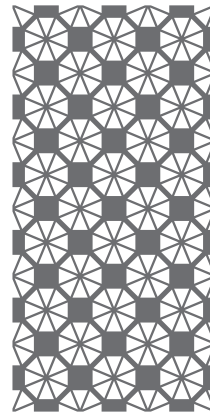

BENGAL

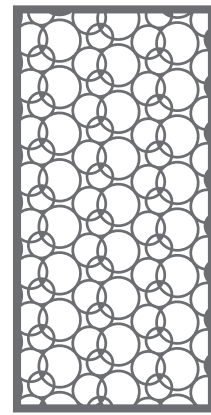


BHARATA




MALINI




MANDAVA

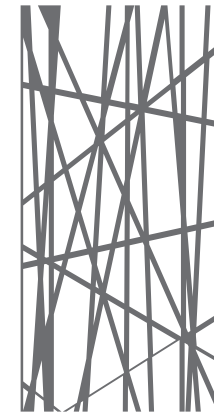


MONSOON

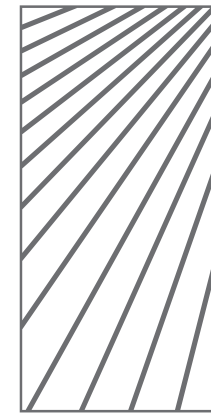

NADU

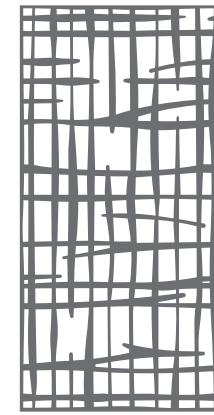


PADMESH

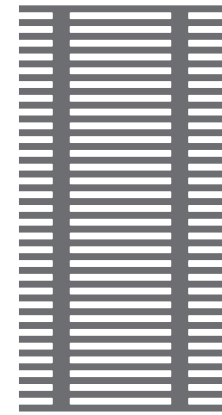


SAKRA


ZINTRA® ACOUSTIC PATTERNS

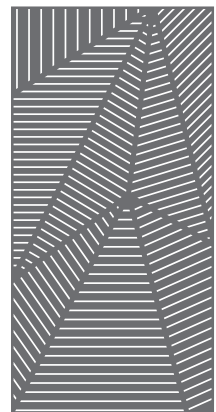

BHUSHAN

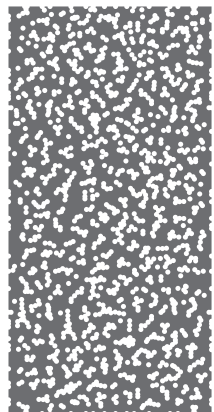


DEEPAK

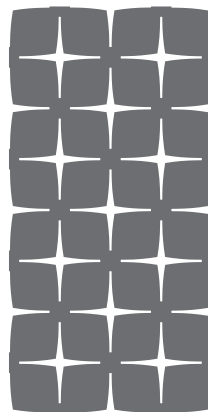


DEVRAJ



ELEPHANTA

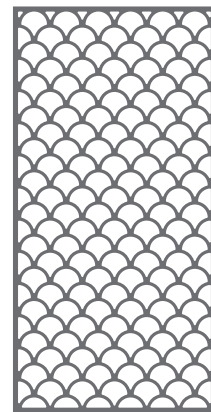


GADIVA

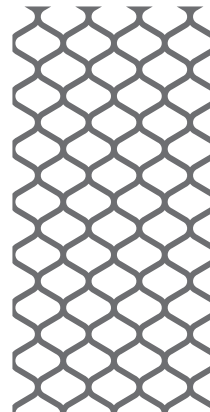


RAJA




SANKARAN

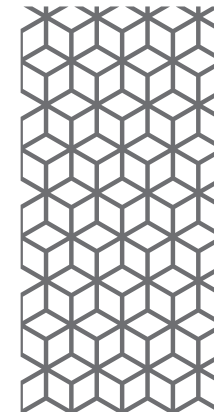


SANSKRIT

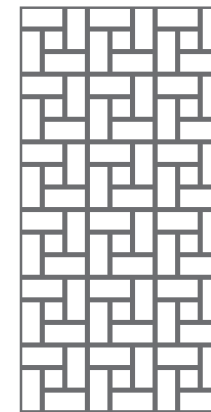

SUTRA

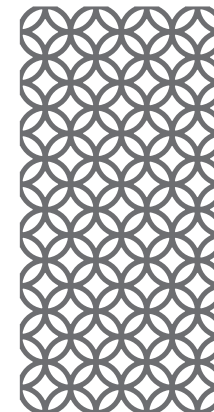


VEDIC

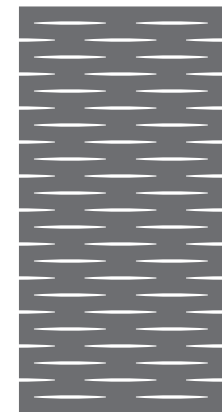


WAMIKA


ZINTRA® ACOUSTIC PATTERNS

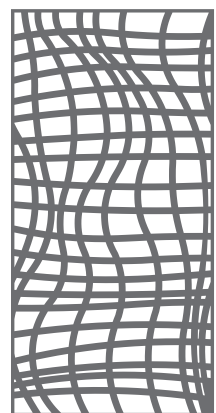

HAIMATI

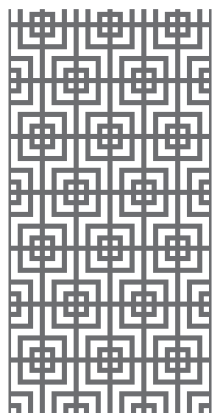


INDUS

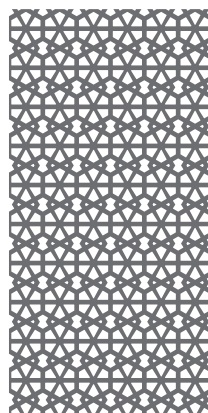


KALI



KERALA

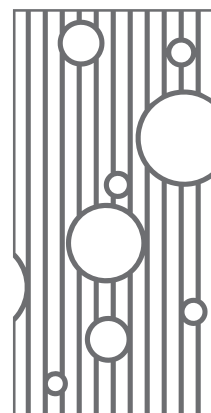


KRISHNAN

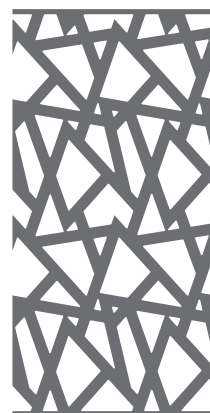

TELUGU



PROSE

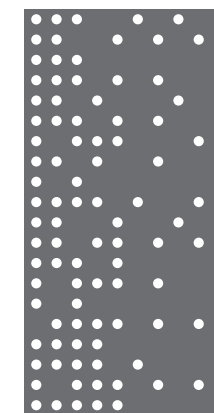


PUNTO



SIPTICAL




HEX

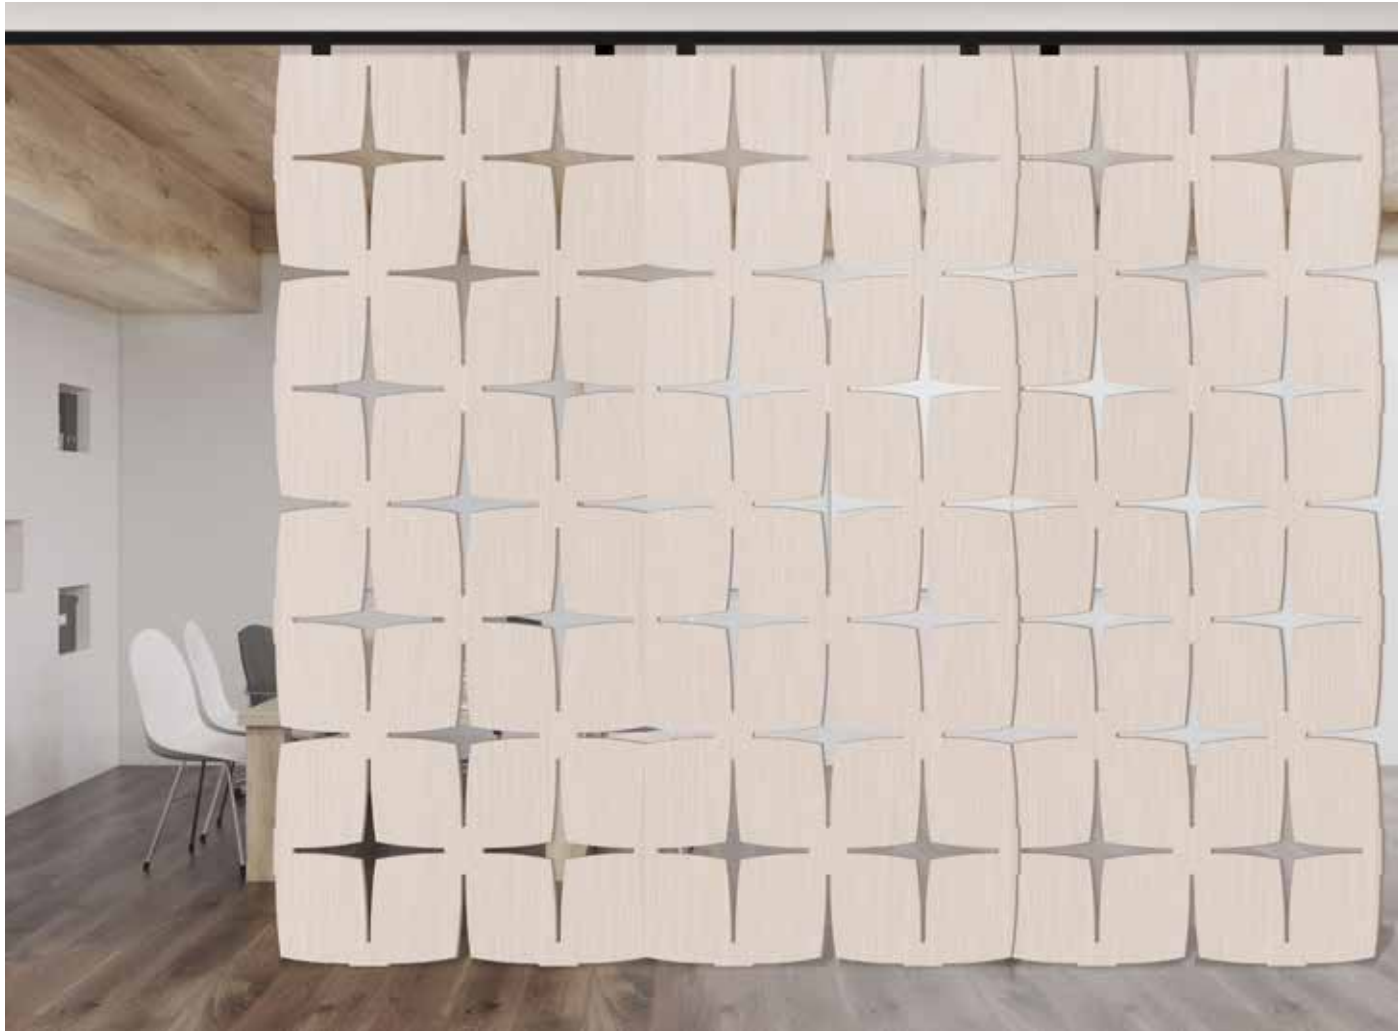

ZINTRA® ACOUSTIC SLIDING PANEL SPECIFICATIONS

CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.30 - 0.95 / NRC 0.45 - 0.90
PANEL SIZE / THICKNESS	2790mm x 1220mm x 12mm
SURFACE FINISH	Matte
WEIGHT	Maximum 2.4kg / m ² depending on design
COLOURS	16 standard colours. (See page 7)
APPLICATION	Indoor areas only
FABRICATION	For the Zintra utility knife. For the aluminium standard woodworking tools
PACKAGE INCLUDES	ZINTRA with sliding track hardware already assembled Satin anodized aluminium track 8 x Flat head screws suitable for timber substrate 4 x panel stoppers 2 x end caps
INSTALLATION	Drill #8 holes in aluminium track Screw fix aluminium track to wall/ceiling Place Zintra screens on to sliding tracking Attach panel stoppers (if required) insert end caps
FIRE RATING	In accordance with EN 13501-1, Zintra Acoustic 12mm and Zintra Pattern on Zintra achieve Class B-s2-d0
CARE INSTRUCTIONS	Vacuum to remove dust. Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellent coating available for additional protection.

SLIDING TRACK ASSEMBLY

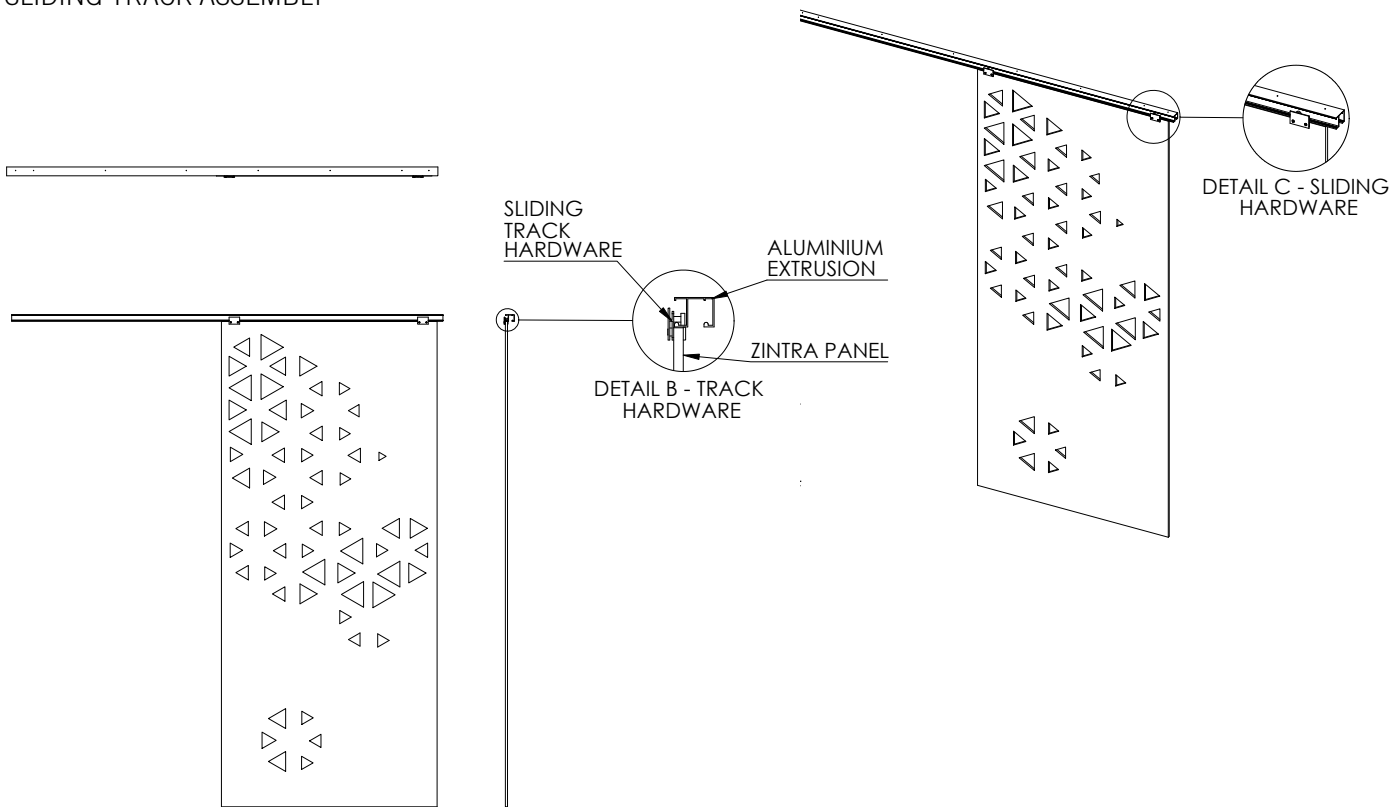

ZINTRA[®] ACOUSTIC BLADES

ZINTRA[®] ACOUSTIC BLADES

WHAT ARE ZINTRA[®] ACOUSTIC BLADES?

Zintr[®] Acoustic Blades are a range of pre-fabricated, wall mounted systems that showcase Zintr's unique, rigid, yet flexible characteristics. Combining aesthetic appeal and acoustic performance, these systems are supplied ready to install with minimal fuss. The increased surface area of the vertical blades presented to the room results in a greater absorption of sound compared to flat panels.

ZINTRA[®] BLADES FEATURES

- Easy to install with supplied hardware
- α_w 0.95 / NRC 0.90
- Customizable height and width
- Ability to mix and match blade colour and shape
- Create custom designs and shapes
- Flat packed for cost effective transport

STANDARD BLADE CONFIGURATIONS (2 BLADE SETS SHOWN):



BLADES BOLT




BLADES RIDGE



BLADES CANYON



BLADES SWELL

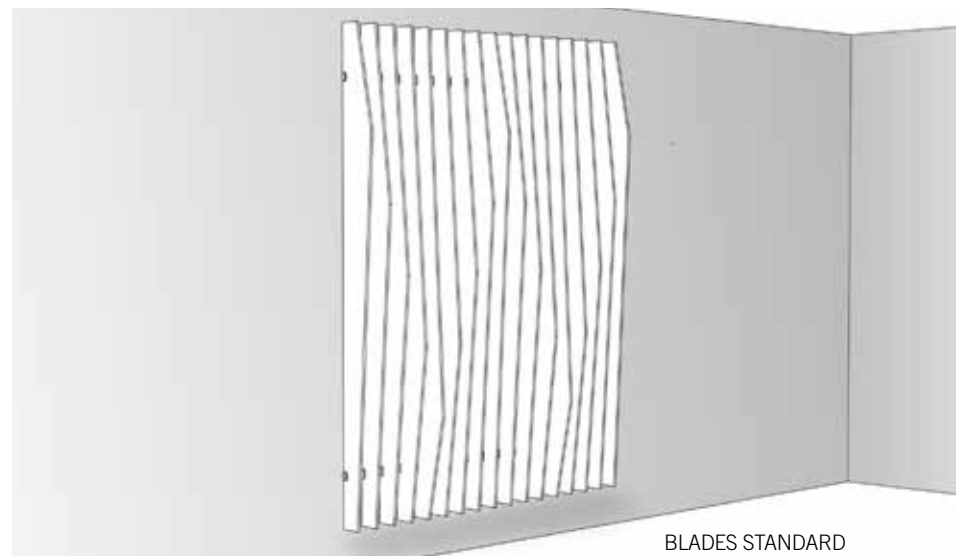


BLADES STANDARD



ZINTRA® ACOUSTIC BLADES SPECIFICATIONS

CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.95 / NRC 0.90
COLOUR	16 standard colours. (See page 7)
STANDARD SIZE	2790mm x 1220mm 1395mm x 1220mm
PACKAGE INCLUDES	Pre-fabricated aluminum frame - 3 each for 2790mm high, 2 each for 1395mm high. Pre-cut Zintra® Acoustic 12mm. End-caps and screws
INSTALLATION	Fix Aluminum Supports to the substrate parallel to each other at appropriate heights. Insert notched Zintra Blades
FIRE RATING	In accordance with EN 13501-1, Zintra Acoustic 12mm achieves Class B-s2-d0
CARE INSTRUCTIONS	Vacuum to remove dust Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellant coating available for additional protection.

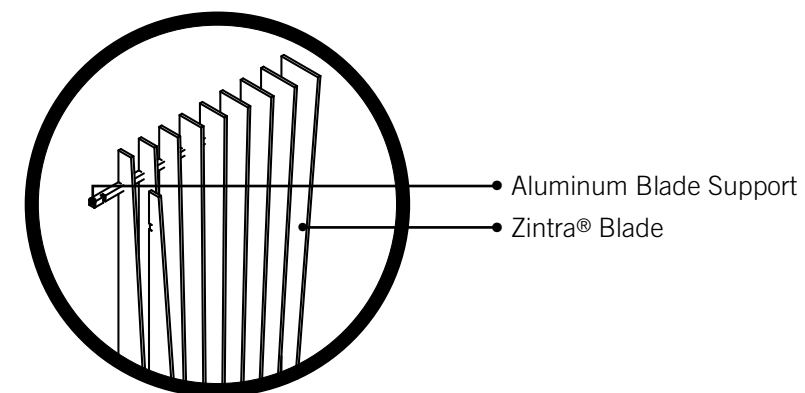

ZINTRA[®] ACOUSTIC BAFFLES

ZINTRA[®] ACOUSTIC BAFFLES

WHAT ARE ZINTRA[®] ACOUSTIC BAFFLES?

The Zintr[®] Acoustic Baffle Systems are an easy to install replacement to standard ceiling tile systems. Zintr[®] Acoustic Baffles are an aesthetically pleasing and high performance ceiling solution that provides exceptional noise reduction. Zintr[®] Acoustic Baffles are ideally suited for large noisy spaces in education, institutional, retail, restaurants and airport projects.

ZINTRA[®] BAFFLES FEATURES


- Comes complete with hardware to install Zintr[®] Acoustic 12mm Baffles
- Easy to install ceiling solution
- α_w 0.95 / NRC 0.90
- Customizable size, Baffle spacing and Baffle depth
- Creates a unique texture and aesthetic for ceilings
- Create custom designs and shapes
- Flat packed for cost effective transport
- Fabricated to specific size of project for simple installation




ZINTRA® ACOUSTIC BAFFLES SYSTEM SPECIFICATIONS

CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.95 / NRC 0.90
BAFFLE DEPTH	120mm or 240mm, Gorge Depth 305mm or 457mm
STANDARD SIZE	1220mm x 1220mm & 1220mm x 2790mm Gorge 1220mm x 1220mm & 1220mm x 1830mm
PACKAGE INCLUDES	Pre-assembled aluminium frame cross runners. Aluminium frame connectors & end caps. Complete hanging hardware including 2000mm of aircraft wire and adjustable hardware. See Clouds Specification for detail
FRAME COLOURS	Clear satin aluminium or in black.
BAFFLE COLOURS	16 standard colours. (See page 7)
BAFFLE THICKNESS	12mm
INSTALLATION	Plot best fixing points for hangers Fix hangers in to place Install pre-cut Zintra® Acoustic 12mm lengths on to frame Hang assembled frame via aircraft wire (provided) Level system to required height
FIRE RATING	In accordance with EN 13501-1, Zintra Acoustic 12mm achieves Class B-s2-d0
CARE INSTRUCTIONS	Vacuum to remove dust Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellent coating available for additional protection.

STANDARD BAFFLE SYSTEM OPTIONS:




BAFFLES 1220mm x 1220mm
PLAN VIEW

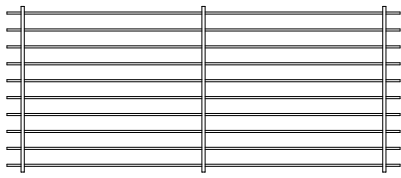


BAFFLE 1220mm x 2790mm
PLAN VIEW




GORGE BAFFLE SYSTEM




BAFFLES - SQUARE

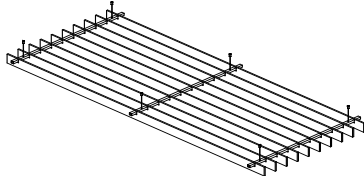


BAFFLES - STANDARD

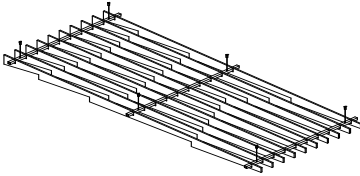


BAFFLES - BOLT

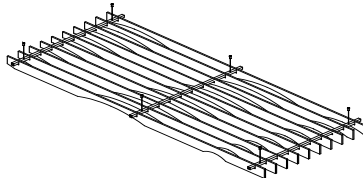


BAFFLES - CANYONS

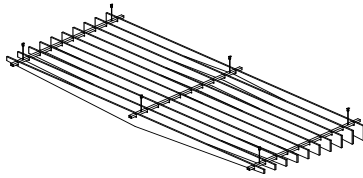

BAFFLES - RIDGES

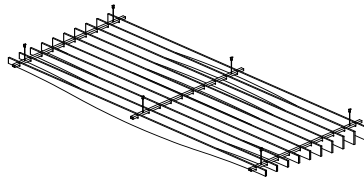

BAFFLES - SWELL

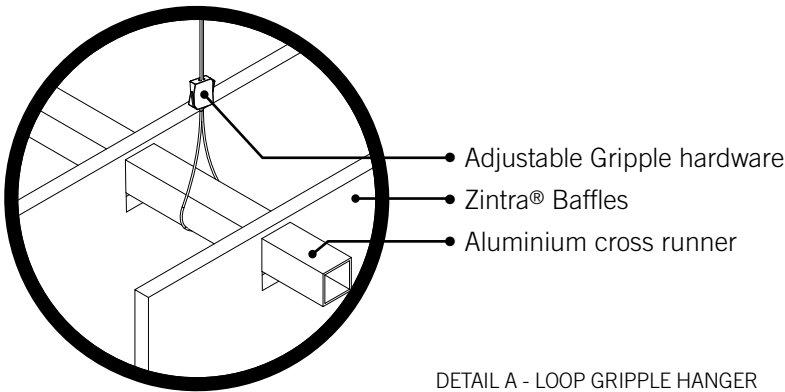


DETAIL A - LOOP GRIPPLE HANGER




ZINTRA® ACOUSTIC INDIVIDUAL BAFFLES SPECIFICATIONS

CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.95 / NRC 0.90
BAFFLE DEPTH	120mm or 240mm
STANDARD SIZE	Maximum 2790mm
PACKAGE INCLUDES	Pre-fabricated Zintra Hanging hardware including 2000mm aircraft wire and adjustable
BAFFLE COLOURS	16 standard Baffle colours (See page 7)
BAFFLE THICKNESS	12mm
INSTALLATION	Plot best fixing points for hangers Fix hangers in to place Hang pre-fabricated Zintra® Acoustic 12mm lengths Level system to required height
FIRE RATING	In accordance with EN 13501-1, Zintra Acoustic 12mm achieves Class B-s2-d0
CARE INSTRUCTIONS	Vacuum to remove dust Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellent coating available for additional protection.

INDIVIDUAL BAFFLE SYSTEMS ASSEMBLY

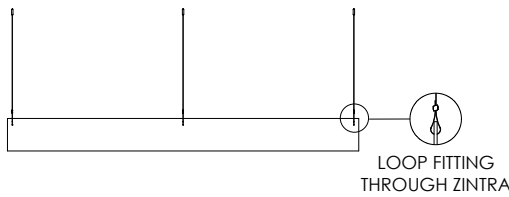

240mm x 2790mm Baffle Front View

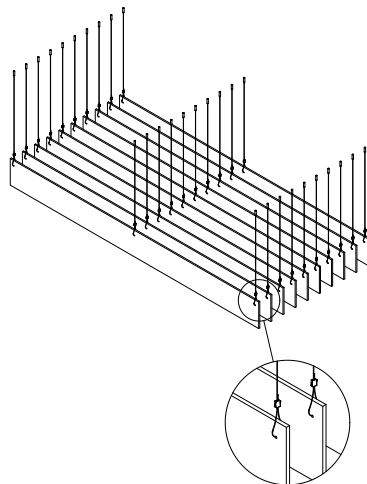

GRIPPLE HANGER THROUGH ZINTRA
3 HANGERS REQUIRED PER 240mm x 2790mm
INDIVIDUAL BAFFLE



ZINTR[®] ACOUSTIC CLOUDS

ZINTR[®] ACOUSTIC CLOUDS


WHAT ARE ZINTR[®] ACOUSTIC CLOUDS?

Reduce the irritating reverberation of sound with Zintr[®] Acoustic Clouds. These pre-fabricated Zintr[®] Acoustic 12mm pieces are quickly and easily assembled on-site, then the shape is suspended from the ceiling substrate. Zintr[®] Acoustic Clouds provide attention grabbing three-dimensional texture that is easily installed, as well as the practical benefit of effective noise reduction.

ZINTR[®] CLOUDS FEATURES


- Cost effective, easy to assemble solution
- α_w 0.95 / NRC 0.90
- Customizable in size and shape
- Unique visual ceiling element
- Comes complete with hanging cables
- Flat packed for cost effective transport

STANDARD CLOUD CONFIGURATIONS:

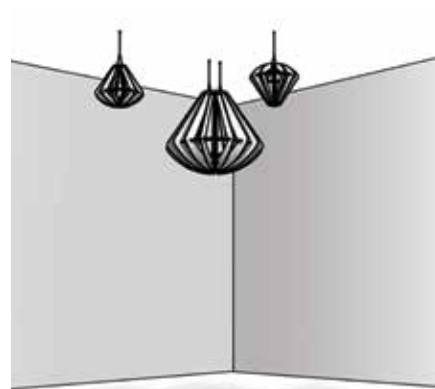


CLOUDS BLANCHARD
1195mm H x 1422mm DIA
584mm H x 356mm DIA

NEW

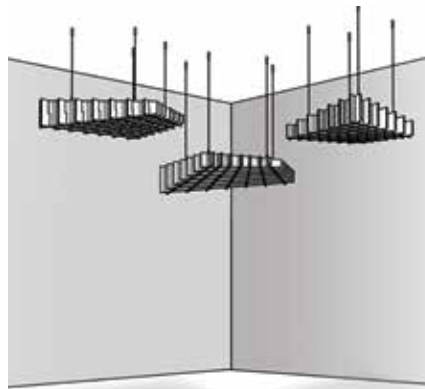


CLOUDS CLOCHETTE
41120mm x 1020mm x 230mm H

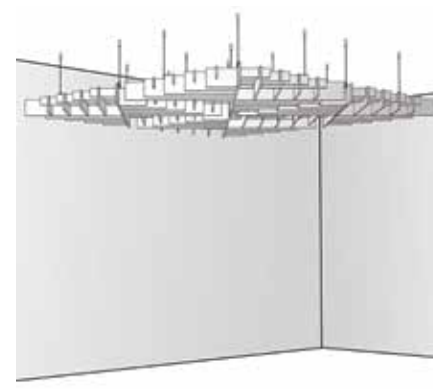


CLOUDS DRANTE*
1220mm x 1220mm x 140mm H
Largest size possible 1830mm x 1830mm




CLOUDS GIFFARD
1803mm H x 1066mm DIA
1193mm H x 685mm DIA
584mm H x 356mm DIA

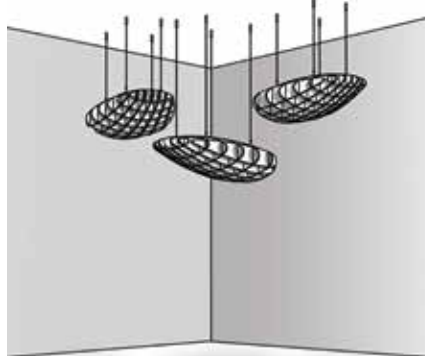


CLOUDS STRATUS
1400mm x 700mm x 292mm H

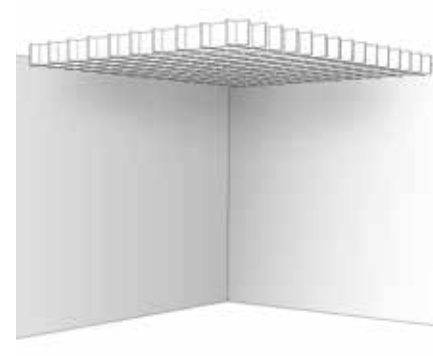

CLOUDS SQUARE*
1220mm x 1220mm x 140mm H
Largest size possible 2790mm x 2790mm

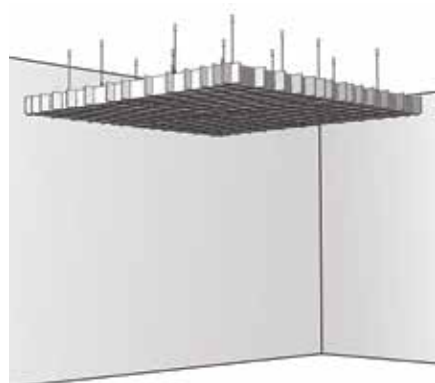

CLOUDS WARP*
1220mm x 1220mm x 140mm H
Largest size possible 2790mm x 2790mm

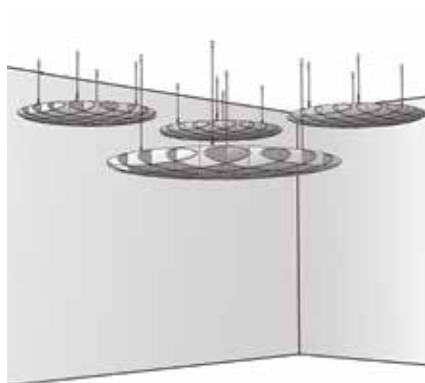


CLOUDS YOOF0E
1220mm dia x 157mm H
Largest size possible 2790mm DIA



ZINTRA® ACOUSTIC CLOUDS SPECIFICATIONS


CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.95 / NRC 0.90
COLOUR	16 standard colours. (See page 7)
PACKAGE INCLUDES	Complete hanging hardware including 2000mm of aircraft wire and adjustable fasteners
INSTALLATION	Assemble clouds as per instructions. Fix hardware (supplied) to ceiling, feed wire through Zintra and adjust height accordingly
FIRE RATING	In accordance with EN 13501-1, Zintra Acoustic 12mm achieves Class B-s2-d0
CARE INSTRUCTIONS	Vacuum to remove dust Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellent coating available for additional protection.

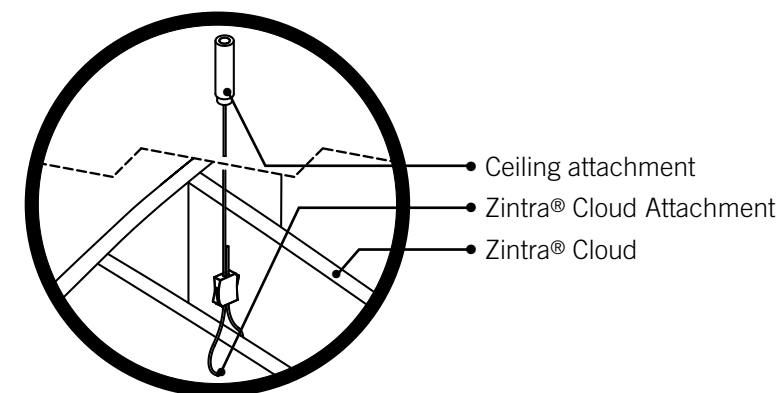


* Drawing shows 4 sets of Clouds




HORIZONTAL PANEL SUPPORT SYSTEM – 1220mm X 1220mm



TOP VIEW




SIDE VIEW

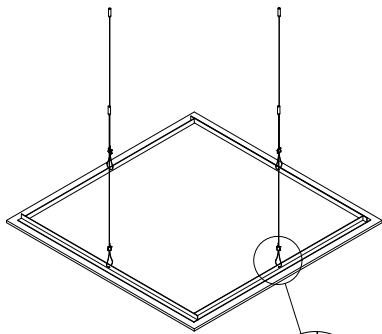

STANDARD LOOP
FITTING INTO HOLES
LOCATED ON ANGLE
(4 PER SYSTEM)


HORIZONTAL PANEL SUPPORT SYSTEM – 1220mm X 2790mm

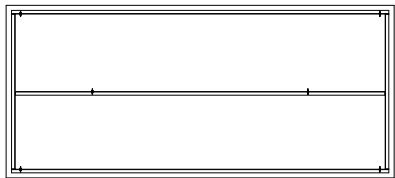

TOP VIEW




SIDE VIEW



END VIEW

ANGLE OFFSET FROM EDGE
ON ALL SIDES

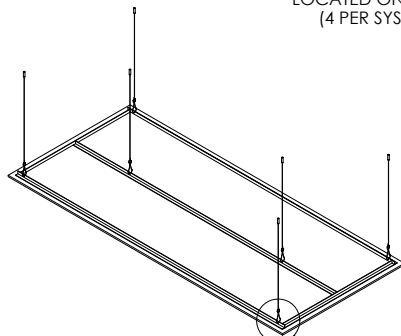

STANDARD LOOP
FITTING INTO HOLES
LOCATED ON ANGLE
(6 PER SYSTEM)

ZINTRA® ACOUSTIC HORIZONTAL PANEL SUPPORT SYSTEM SPECIFICATIONS

CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.95 / NRC 0.90 for single layer, aw 0.90 / NRC 0.95 for double layer
PANEL OPTIONS	Zintra panel only, Zintra Pattern on Zintra or Zintra Digitally Printed
SIZE OPTIONS	1220mm x 1220mm and 1220mm x 2790mm
COLOUR	16 standard colours. (See page 7)
PACKAGE INCLUDES	Zintra with aluminium L angle fixed to panel back. Complete hanging hardware including 2000mm of aircraft wire and adjustable fasteners
INSTALLATION	Fix hardware (supplied) to ceiling, feed wire through aluminium support and adjust height accordingly
FIRE RATING	In accordance with EN 13501-1, Zintra Acoustic 12mm achieves Class B-s2-d0
CARE INSTRUCTIONS	Vacuum to remove dust Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellent coating available for additional protection.

ZINTRA® ACOUSTIC CONCERTINA


ZINTRA® ACOUSTIC CONCERTINA

WHAT ARE ZINTRA® ACOUSTIC CONCERTINA?

Concertina screens are a new way to take full advantage of Zindra® Acoustic Panel. Zindra® Concertina utilizes plain or Zindra on Zindra® panels connected with flexible straps to form a lightweight, portable partition solution and is also available with a stand. No assembly is required, just stand it up and adjust the angles to suit. When it's no longer needed simply fold flat and store away.

ZINTRA® CONCERTINA FEATURES

- α_w 0.90 / NRC 0.95
- No assembly required
- Tone-on-tone or two tone colour combinations
- Easily movable by one person

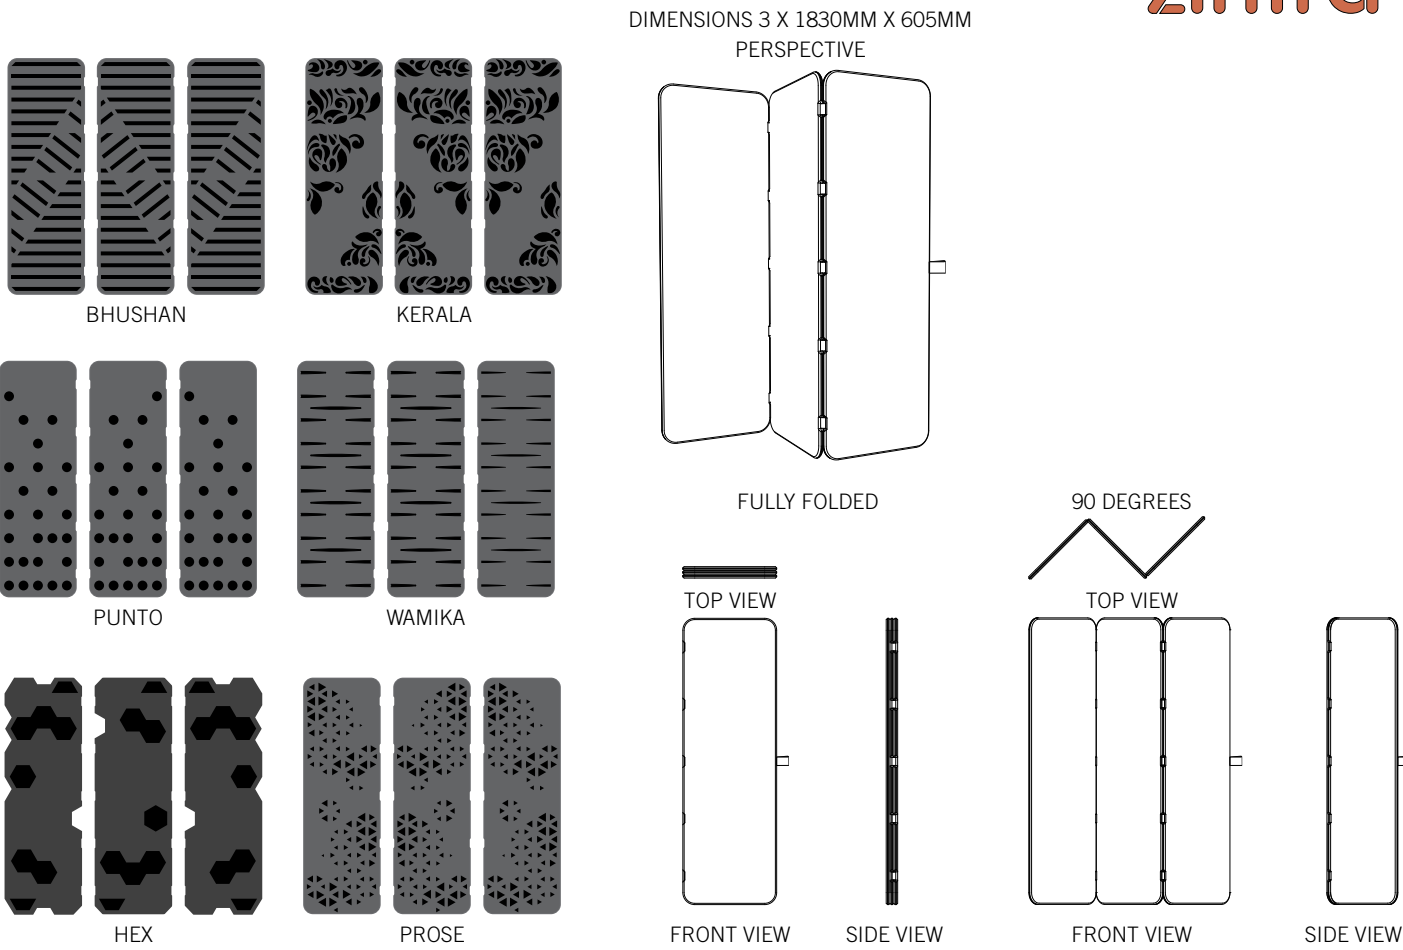

ZINTRA® ACOUSTIC CONCERTINA SPECIFICATIONS

CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.90 / NRC 0.95
THICKNESS	24mm
SIZE	3 panels of 605mm x 1830mm
COLOURS	16 standard colours. (See page 7)
OPTIONS	Available with no pattern, pattern to one side and pattern to both sides
APPLICATION	Indoor areas only.
FIRE RATING	In accordance with EN 13501-1, Zintra Acoustic 12mm and Zintra Pattern on Zintra achieve Class B-s2-d0
CARE INSTRUCTIONS	Vacuum to remove dust. Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellent coating available for additional protection.
OPTIONAL EXTRA	Steel fixing plate to fix it in place – available in White

ZINTRA® DESK SOLUTIONS



ZINTRA® DESK SOLUTIONS

WHAT ARE ZINTRA® ACOUSTIC SOLUTIONS?

Zintra Desk Solutions grants privacy with minimal impact to the overall 'openness' of a design. The three products; Desk Divider, Desk Modesty Panel and Desk Screen are crafted from Zintra® Acoustic 12mm Panel providing acoustic and aesthetic appeal in a range of colours and designs. They are available in a variety of versatile sizes and configurations to allow easy tailoring to your specific environment needs. They accommodate all desk thicknesses from 9mm - 36mm and can be temporarily or permanently fixed depending upon the individual needs of the project.

ZINTRA® DESK SOLUTIONS FEATURES

- NRC = aw 0.30 – 1.0 / NRC 0.35 - 1.0 depending on positioning
- Easy to assemble
- Tone-on-tone or two tone colour combinations
- Tackable
- Accommodates most desk thicknesses



BHUSHAN



KERALA



PUNTO



WAMIKA



HEX





PROSE

* Plain version also available

ZINTRA® DESK DIVIDER SPECIFICATIONS

CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.90 / NRC 0.95
THICKNESS	24mm
PANEL HEIGHT FROM TOP OF DESK	280mm or 482mm
SURFACE FINISH	Matte
COLOURS	16 standard colours. (See page 7)
OPTIONS	Available with no pattern, pattern to one side and pattern to both sides.
APPLICATION	Indoor areas only.
FIRE RATING	In accordance with EN 13501-1, Zintra Acoustic 12mm and Zintra Pattern on Zintra achieve Class B-s2-d0
CARE INSTRUCTIONS	Vacuum to remove dust Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellent coating available for additional protection.

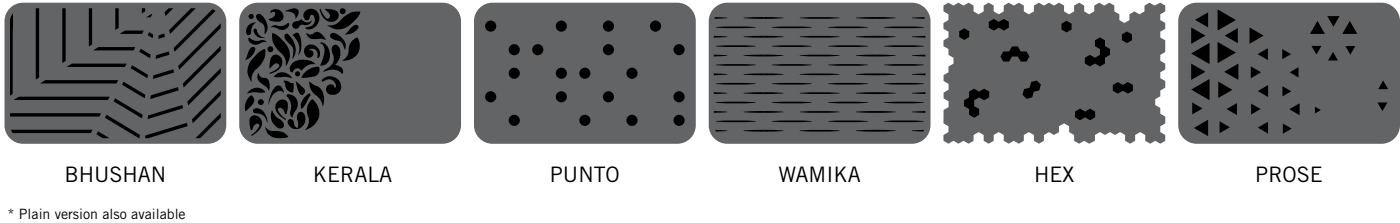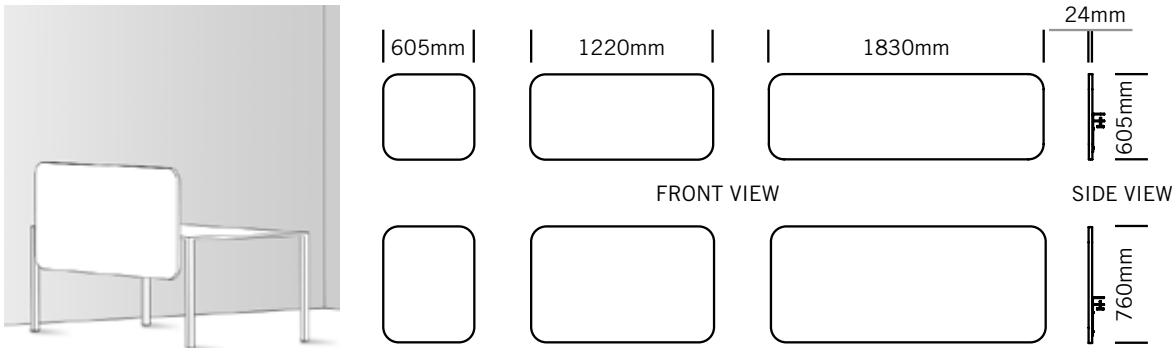

ZINTRATM DESK MODESTY SPECIFICATIONS

CONTENT	100% Polyester
ACOUSTIC RATING	aw 0.90 / NRC 0.95
THICKNESS	24mm
SIZE	Height from desk surface 280mm or 482mm Length 605mm (2 brackets), 1220mm (3 brackets) or 1830mm (4 brackets)
SURFACE FINISH	Matte
WEIGHT	4.8kg / m²
COLOURS	16 standard colours. (See page 7)
OPTIONS	Available with no pattern, pattern to one side and pattern to both sides
APPLICATION	Indoor areas only.
FIRE RATING	In accordance with EN 13501-1, Zintratm Acoustic 12mm and Zintratm Pattern on Zintratm achieve Class B-s2-d0
CARE INSTRUCTIONS	Vacuum to remove dust Remove spills immediately using a clean damp cloth or with soap and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first. Stain repellant coating available for additional protection.